



WWW.HYSTER.COM

SEATED ELECTRIC TOW TRACTOR PRODUCT BROCHURE

TA60UT



TAGOUT OVERVIEW

The Hyster® seated electric tow tractor TA60UT combines ergonomic features and reliable performance with energy efficient technology. Low maintenance delivers increased productivity and reduced operational costs.

Productivity

- High-power maintenance free AC drive motor
- Impressive pulling performance
- Seamless travel and maneuverability
- Rear dual-position tow coupling
- Ergonomic layout to maximize operational efficiency and safety
- Adjustable seat and steering column
- Multi-function LCD dash display
- Automatic electromagnetic parking brake
- Audible reverse alarm

Serviceability

- Easy access for fast and efficient servicing
- Simple, readily available components
- Computer based diagnostics not required

Safety and Structural Design

- Operator Presence System (OPS)
- Non-slip, uncluttered floor plate
- Drive axle design and low center of gravity helps provide stability
- Emergency stop button
- Audible reverse alarm
- High-quality, robust components
- Low-noise level

Optional Features

- Battery side extraction
- Keyless key switch (password)
- Blue light and strobe light
- Document storage compartment



Easy service access via back cover





Ergonomic operator compartment



Informative LCD dash display

SPECIFICATIONS AND DIMENSIONS

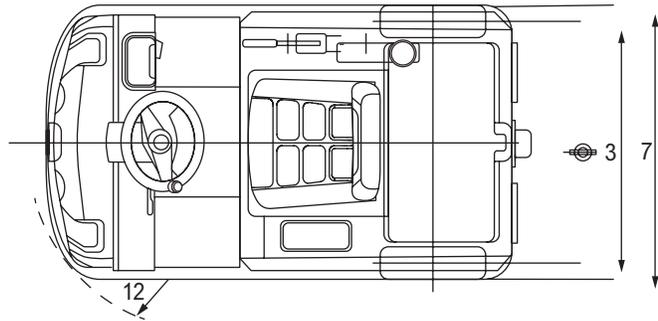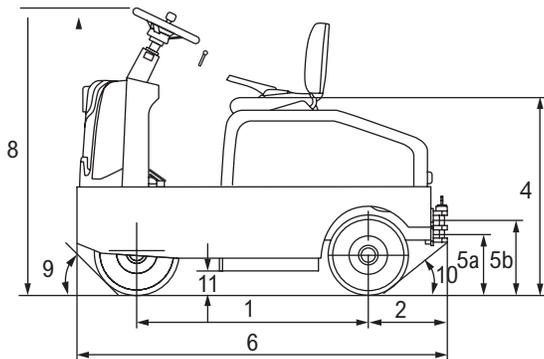

MODEL		TA60UT
Power type		36-volt
Operator type		Seated
Rated capacity	lb (kg)	6,614 (3,000)
Drawbar pull, 60 min rating	lbf (N)	168.6 (750)
Max drawbar pull, 5 min rating	lbf (N)	*
Wheelbase	[1] in (mm)	41.54 (1,055)
Rear load distance	[2] in (mm)	15.04 (382)
Service weight	lb (kg)	1,719.6 (780)
Axle loading, unladen front/rear	lb (kg)	683.4 (310)/1,036.2 (470)
Front, tire size/type (no. of wheels)		15 x 4.5 - 8 Solid (1)
Rear, tire size/type (no. of wheels)		15 x 4.5 - 8 Solid (2)
Wheel tread, front	in (mm)	n/a
Wheel tread, rear	[3] in (mm)	33.86 (860)
Seat height/STD	[4] in (mm)	35.8 (910)
Coupling height	[5a/5b] in (mm)	11 (280)/13.78 (350)
Overall length	[6] in (mm)	67.71 (1,720)
Overall width	[7] in (mm)	38.1 (968)
Overall height (excluding cab)	[8] in (mm)	50 (1,270)
Approach angle	[9] degrees	≥54
Departure angle	[10] degrees	≥37
Min ground clearance	[11] in (mm)	3.54 (90)
Turning radius	[12] in (mm)	58.66 (1,490)
Travel speed, unladen	mph (km/h)	6.21 (10)
Travel speed, laden	mph (km/h)	4.35 (7)
Gradeability, laden/unladen	%	7/12
Service brake/parking brake		Hydraulic/electromagnetic
Drive control		AC
Drive motor rating *S2 60 min	hp (kW)	4 (3)
Battery ampere hours	Ah	250
Battery weight	lb (kg)	445.3 (202)
Sound level at the drivers ear according to EN/DIN 12053	dB (A)	68



Hyster Company
P.O. Box 7006, Greenville, North Carolina 27835-7006

© Hyster Company. 2023, all rights reserved. Hyster and  are trademarks of Hyster-Yale Group, Inc.
Hyster products are subject to change without notice. Trucks may be shown with optional equipment.