

# Genie® GR-26J

## Specifications

| Models                                       | GR-26J |
|--|--------|
| Working height max. - indoor <sup>(1)</sup>  | 9.90 m |
| Working height max. - outdoor <sup>(1)</sup> | 9.90 m |
| Platform height max. - indoor                | 7.90 m |
| Platform height max. - outdoor               | 7.90 m |
| Horizontal reach max.                        | 2.65 m |
| Working horizontal reach max.                | 3.15 m |
| Up-and-over clearance max.                   | 6.70 m |
| <b>A</b> Platform length                     | 0.75 m |
| <b>B</b> Platform width                      | 0.90 m |
| Toeboard Height                              | 15 cm  |
| <b>C</b> Height - stowed                     | 1.99 m |
| <b>D</b> Length- stowed                      | 2.82 m |
| <b>E</b> Width                               | 0.99 m |
| <b>F</b> Wheelbase                           | 1.2 m  |
| <b>G</b> Ground clearance (center)           | 10 cm  |

## Productivity

|   |           |
|---|-----------|
| Maximum platform occupancy (in/out)     | 2/1       |
| Lift capacity                           | 200 kg    |
| Lift capacity - extension deck extended | 136 kg    |
| Vertical jib rotation                   | 140°      |
| Turntable rotation                      | 350°      |
| Drive speed - stowed                    | 4.5 km/h  |
| Drive speed - raised                    | 0.65 km/h |
| Gradeability <sup>(2)</sup>             | 25%       |
| Turning radius - inside                 | 59 cm     |
| Turning radius - outside                | 2.08 m    |
| Lifting speed - raise/lower             | 54/40 sec |
| Controls - proportional                 | 24V DC    |
| Tires - Solid non-marking               | 40.5 cm   |

## Power

|                         |                   |
|-------------------------|-------------------|
| Power                   | 24V (12×2V 250Ah) |
| Hydraulic tank capacity | 22L               |



## Weight<sup>(3)</sup> and Floor Loading<sup>(4)</sup>

|                         |                         |
|-------------------------|-------------------------|
| Weight                  | 2,650 kg                |
| Tire load max.          | 1,485 kg                |
| Occupied floor pressure | 2,054 kg/m <sup>2</sup> |

## Sound and Vibration Levels

|   |                        |
|---|------------------------|
| Sound Pressure level (ground workstation)   | < 70 dBA               |
| Sound Pressure level (platform workstation) | < 70 dBA               |
| Vibrations                                  | < 2.5 m/s <sup>2</sup> |

## Range of motion GR-26J

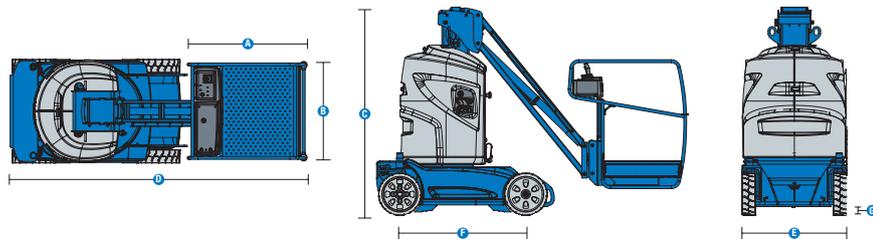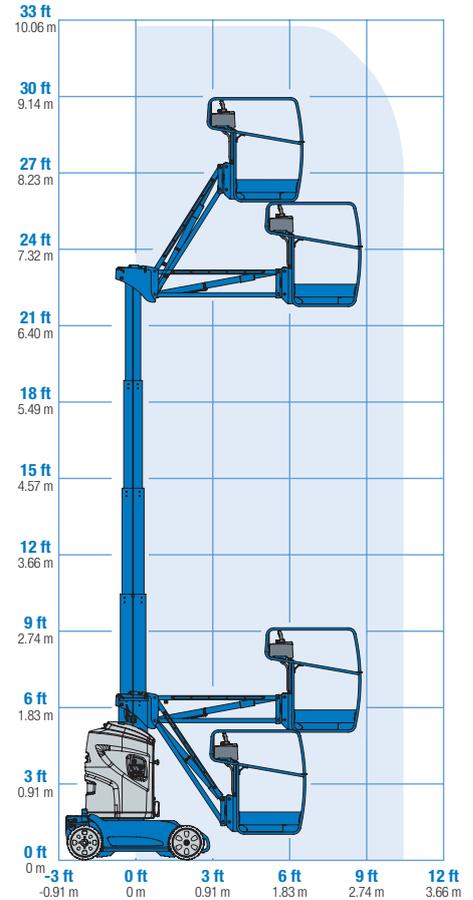

(1) The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 (2) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.  
 (3) Weight refers to standard configuration and may vary depending on options and/or country standards.  
 (4) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

# Genie® GR-26J

**SKU: Standard Model**

- GR-26J\*

\* Build to Order

| Option availability |  | S | S+ | BtO |
|---------------------|--|---|----|-----|
| Power               | 24V DC, twelve 2V batteries, 250Ah capacity              |   |    | ✓   |
|                     |  |   |    |     |
| Platform            | Steel sliding mid-rail platform                          |   |    | ✓   |
|                     | Steel tube-in-tube mast system                           |   |    | ✓   |
|                     | Plug and socket with RCBO                                |   | ○  | ○   |
|                     | Plug and socket, no RCBO                                 |   | ○  | ○   |
|                     | Air line to platform                                     |   | ○  | ○   |
|                     | AC power to platform                                     |   | ○  | ○   |
|                     | Auxiliary platform lowering                              |   |    | ✓   |
|                     | Platform load sense system                               |   |    | ✓   |
|                     | Proportional lift and drive                              |   |    | ✓   |
| Chassis             | Flashing beacon  |   | ○  | ○   |
|                     | Descent, tilt, and motion alarm                          |   |    | ✓   |
|                     | Direct electric rear wheel drive                         |   |    | ✓   |
|                     | Drive enable system                                      |   |    | ✓   |
|                     | Electric brake release                                   |   |    | ✓   |
|                     | Fork pockets   |   |    | ✓   |
|                     | Front wheel steer  |   |    | ✓   |
|                     | Hour meter   |   |    | ✓   |
|                     | On-board diagnostic system with battery charge indicator |   |    | ✓   |
|                     | Pothole protection                                       |   |    | ✓   |
|                     | Reinforced ABS chassis covers                            |   |    | ✓   |
|                     | Solid non-marking tires                                  |   |    | ✓   |
|                     | Tie-down attachment points                               |   |    | ✓   |

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options



Indoor & Outdoor



Narrow Access



Proportional lift and drive



**Genie Genuine Accessories<sup>(1)</sup>**

- Lift Tools productivity tools
- Lift Connect Telematics subscription extension
- Tech Pro Link Connector

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.